



BOSCH



Concrete Catalogue

Power tools, measuring tools and accessories

Nguvu Mkononi na Bosch!

Cordless

GSB 120-LI
Cordless Impact Drill

06019G81L0



Battery volatge	12 V
Torque (soft / hard)	14 / 30 Nm
No-load speed (1 st gear / 2 nd gear)	0-400 / 0-1500 rpm
Drilling diameter in masonry/wood/ steel	8/20/10 mm
Scope of supply	2x 1.5Ah Li-ion battery, charger, carrying case

GSB 180-LI
Cordless Impact Drill

06019F83L6



Battery volatge	18 V
Torque (soft / hard)	21 / 54 Nm
No-load speed (1 st gear / 2 nd gear)	0-500 / 0-1900 rpm
Max drilling diameter in wood / masonry / steel	35 / 10 / 10 mm
Scope of supply	1 x 1.5 Ah Li-ion battery, charger, carrying case

GSB 180-LI + 23 accessories
Cordless Impact Drill

06019F83L1



Battery volatge	18 V
Torque (soft / hard)	21 / 54 Nm
No-load speed (1 st gear / 2 nd gear)	0-500 / 0-1900 rpm
Max drilling diameter in wood / masonry / steel	35 / 10 / 10 mm
Scope of supply	2 x 1.5 Ah Li-ion battery, charger, carrying case

GBH 180-LI
Cordless Rotary Hammer

06119111L2



Battery volatge	18 V
Max. impact energy	2 J
Drilling diameter in concrete / wood / steel	4-20 / 30 / 13 mm
Impact rate	0-5100 bpm
Scope of supply	2 x 4.0 Ah Li-ion battery, charger, carrying case

Drilling

GSB 570
Impact Drill

06011B70L0



Rated input power	570 W
No-load speed	0 - 2800 rpm
Chuck capacity	1.5 - 13 mm
Drilling Ø in wood / concrete / steel	25 / 13 / 10 mm



GSB 550 + 75 accessories
Impact drill

06011A15L2



Rated input power	550 W
No-load speed	0-2800 rpm
Chuck capacity	1.5 - 13 mm
Drilling diameter in wood / concrete / steel	25 / 13 / 10 mm

GSB 550 + 90 accessories
Impact drill

06011A15L1



Rated input power	550 W
No-load speed	0-2800 rpm
Chuck capacity	1.5 - 13 mm
Drilling diameter in concrete / wood / steel	25 / 13 / 10

Drilling & Demolition

GBH 2-20 DRE
Rotary Hammer

061125A4L0



Rated input power	600 W
Max. impact energy	1.7 J
Drilling diameter in concrete / wood / steel	4-20 / 30 / 13 mm
Impact rate	0 - 4400 bpm
Tool holder	SDS Plus

GSH 500
Demolition Hammer

06113387L0



Rated input power	1100 W
Max. impact energy	7.8 J
Impact rate	2900 bpm
Weight	5.6 Kg
Tool holder	SDS Max

Cutting

GWS 2000-180
Angle Grinder

06018B70P0



Rated input power	2000 W
Disc diameter	180 mm
No-load speed	8500 rpm
Grinding spindle thread	M 14

GWS 2000-230 + CB
Angle Grinder

06018B80P1



Rated input power	2000 W
Disc diameter	230 mm
No-load speed	6500 rpm
Grinding spindle thread	M 14

GWS 2200-180
Angle Grinder

06018C00P0



Rated input power	2200 W
Disc diameter	180 mm
No-load speed	8500 rpm
Grinding spindle thread	M 14

GWS 2200-230
Angle Grinder

06018C10P0



Rated input power	2200 W
Disc diameter	230 mm
No-load speed	6500 rpm
Grinding spindle thread	M 14

GWS 700
Angle Grinder

06013A30L0



Rated input power	710 W
Disc diameter	115 mm
No-load speed	12000 rpm
Grinding spindle thread	M 14

GDC 140
Marble Cutter

06013A00L0



Rated input power	1400 W
Disc diameter	115 mm
No-load speed	13200 rpm
Bore size	20 mm
Cutting depth	34 mm

GSS 140 Orbital Sander

06012A80L0



Rated input power	220W
No-load orbital stroke rate	28000 opm
Sanding sheet for clamping, Length x width	140 x 114 mm
Weight	1.2 Kg
Scope of supply	3 x sanding sheet C470, Best for wood + paint, 80

GSS 2300 Orbital Sander

06012980L0



Rated input power	190 W
No-load orbital stroke rate	24000 opm
Sanding sheet for clamping, Length x width	230 x 93 mm
Weight	1.5 Kg
Scope of supply	3 sanding sheets

Dust Extraction & Cleaning

GAS 15 Wet & Dry Extractor

06019E5000



Rated input power	1100 W
Filter surface area	2300 cm²
Container volume, gross	15 l
Weight	6 Kg
Max.air flow rate (turbine)	53 l / s

GBL 620 Blower

06019805L0



Rated input power	620 W
Volumetric flow rate	3.5 m³ / min
No-load speed	16000 rpm
Weight	1.7 Kg
Scope of supply	Nozzle

Cordless

GSB 18V-50 Cordless Impact Drill

06019H51L0



HEAVY
DUTY

Battery volatge	18 V
Torque (soft / hard)	28 / 50 Nm
No-load speed (1st gear / 2nd gear)	0-400 / 0-1800 rpm
Drilling diameter in masonry / wood / steel	13 / 35 / 13 mm
Scope of supply	2 x 2.0Ah Li-ion battery, charger, carrying case

GSB 18V-60 C Cordless Impact Drill

06019G2170



HEAVY
DUTY

Battery volatge	18 V
Torque (soft / hard)	31 / 60 Nm
No-load speed (1st gear / 2nd gear)	0-600 / 0-1900 rpm
Drilling diameter in masonry / wood / steel	13 / 38 / 13 mm
Scope of supply	2 x 5.0 Ah Li-ion battery, charger, carrying case

HEAVY
DUTY

Cordless | FreeMix



2. Choose your tools

GBH 18V-26 F Cordless Rotary Hammer

0611910000



HEAVY
DUTY

Battery volatge	18 V
Max. impact energy	2.6 J
Drilling diameter in concrete / wood / steel	26 / 30 / 13 mm
Impact rate	0 - 4350 bpm
Scope of supply	Without battery and charger

GWS 18V-LI Cordless Angle Grinder

060193A300



HEAVY
DUTY

Battery volatge	18 V
No-load speed	10000 rpm
Disc Diameter	115 mm
Grinding spindle thread	M 14
Scope of supply	Without battery and charger

3. Ready to go!

Get the Bosch Tool bag for convenient storage and transportation.



HEAVY
DUTY

1. Select your charger / battery / starter set



GAL 18V-40 | 1600A019RJ



GAL 1880 CV | 1600A00B8H



GBA 18V, 5.0 Ah | 1600A002U5



ProCore 18V, 8.0 Ah | 1600A016GK



ProCore 18V, 12.0 Ah | 1600A016GU



StarterKit 18V 4.0 Ah | 1600A002F9



StarterKit 18V 5.0 Ah | 1600A00B8K

Drilling & Mixing

GSB 13 RE + accessories
Impact drill

06012271L1



HEAVY DUTY

Rated input power	650 W
No-load speed	0 - 2800 rpm
Chuck capacity	1.5 -13 mm
Drilling diameter in concrete / wood / steel	13 / 25 / 10 mm

GSB 16 RE + accessories
Impact drill

06012281L1



HEAVY DUTY

Rated input power	750 W
No-load speed	0 - 3250 rpm
Chuck capacity	1.5 - 13 mm
Drilling diameter in concrete / wood / steel	16 / 25 / 13 mm

GSB 20-2 RE
Impact Drill

06011A21L0 (Keyed)



HEAVY DUTY

Rated input power	800 W
No-load speed (1 st gear / 2 nd gear)	0 - 1100 / 3000 rpm
Chuck capacity	1.5 - 13 mm
Drilling Ø in concrete/wood/steel	20/40/13 mm

GSB 24-2
Impact drill

060119C801(Keyless)
060119C970(Keyed)



HEAVY DUTY

Rated input power	1100 W
No-load speed	0 - 900 / 3000 rpm
Chuck capacity	1.5 - 13 mm
Drilling diameter in concrete / wood / steel	24 / 40 / 16 mm

GSB 162-2 RE
Impact drill

060118B070



HEAVY DUTY

Rated input power	1500 W
No-load speed	0 - 750 / 1800 rpm
Chuck capacity	3 - 16 mm
Drilling diameter in concrete / masonry* / wood / steel	82 / 162 / 50 / 20

*using dry core cutters

GBM 1600 RE
Rotary Drill

06011B00L0



HEAVY DUTY

Rated input power	850 W
No-load speed	0 - 630 rpm
Stirrer capacity	160 mm

HEAVY DUTY

Drilling & Demolition

GBH 2-24 DRE
Rotary Hammer

06112721L1



HEAVY DUTY

Rated input power	790 W
Max. impact energy	2.7 J
Drilling diameter in concrete / wood / steel	24 / 30 / 13 mm
Impact rate	0 - 4200 bpm
Tool holder	SDS Plus

GBH 2-24 DFR
Rotary Hammer

06112730L1



HEAVY DUTY

Rated input power	790 W
Max. impact energy	2.7 J
Drilling diameter in concrete / wood / steel	24 / 30 / 13 mm
Impact rate	0 - 4200 bpm
Tool holder	SDS Plus, free chuck

GBH 2-26 F
Rotary Hammer

06112A4070



HEAVY DUTY

Rated input power	830 W
Max. impact energy	2.7 J
Drilling diameter in concrete / wood / steel	26 / 30 / 13 mm
Impact rate	0 - 4000 bpm
Tool holder	SDS Plus, free chuck

GBH 2-28 F
Rotary Hammer

06112676P0



HEAVY DUTY

Rated input power	880 W
Max. impact energy	3.2 J
Drilling diameter in concrete / wood / steel	28 / 30 / 13 mm
Impact rate	0 - 4000 bpm
Tool holder	SDS Plus, free chuck

GBH 4-32 DFR
Rotary Hammer

0611332171



HEAVY DUTY

Rated input power	900 W
Max. impact energy	4.2 J
Drilling diameter in concrete / wood / steel	32 / 32 / 23 mm
Impact rate	0 - 3600 bpm
Tool holder	SDS Plus, free chuck

GBH 5-40 D
Rotary Hammer

0611269070



HEAVY DUTY

Rated input power	1100 W
Max. impact energy	8.5 J
Drilling diameter in concrete / masonry*	40 / 90 mm
Impact rate	1500 - 2900 bpm
Tool holder	SDS Max

*using dry core cutters

GBH 8-45 DV
Rotary Hammer

0611265070



HEAVY DUTY

Rated input power	1500 W
Max. impact energy	12.5 J
Drilling diameter in concrete / masonry*	45 / 125 mm
Impact rate	1380 - 2760 bpm
Tool holder	SDS Max

*using dry core cutters

GBH 12-52 DV
Rotary Hammer

0611266070



HEAVY DUTY

Rated input power	1700 W
Max. impact energy	19 J
Drilling diameter in concrete / masonry*	52 / 150 mm
Impact rate	1750 -2150 rpm
Tool holder	SDS Max

*using dry core cutters



Mixing Applications:

- Paint
- Mortar
- Gypsum Filler

Demolition

GSH 11 E
Demolition Hammer

06113168L0



HEAVY DUTY

Rated input power	1500 W
Max. impact energy	16.8 J
Impact rate	900 - 1890 bpm
Weight	10.1 Kg
Tool holder	SDS Max

GSH 11 E + 4 Chisels
Demolition Hammer

06113168L1



HEAVY DUTY

Rated input power	1500 W
Max. impact energy	16.8 J
Impact rate	900 - 1890 bpm
Weight	10.1 Kg
Tool holder	SDS Max

GSH 16-28
Breaker

0611335070



HEAVY DUTY

Rated input power	1750 W
Max. impact energy	41 J
Impact rate	1300 bpm
Weight	16.5 Kg
Tool holder	28 mm internal hexagon

GSH 27 VC
Breaker

06019C8003



HEAVY DUTY

Rated input power	2000 W
Max. impact energy	62 J
Impact rate	1000 bpm
Weight	29.5 Kg
Tool holder	28 mm internal hexagon

Diamond Drilling



GDB 180
Diamond Drill

0601189870

HEAVY DUTY

Rated input power	2000 W
Drilling diameter in concrete	180 mm
Suitability	Wet drilling in concrete
Weight	5.2 Kg
Tool holder	1 1 / 4" UNC

GCR 180
Diamond Drill Stand

0601190100



HEAVY DUTY

Drilling diameter in concrete	180 mm
Column length	767 mm
Drill stroke	514 mm
Weight	9.5 Kg
Securing, type	bolted

Cutting

GWS 750-115 + CB
Angle Grinder

0601394074



HEAVY DUTY

Rated input power	750 W
Disc diameter	115 mm
No-load speed	11000 rpm
Grinding spindle thread	M 14

GWS 9-115
Angle Grinder

06013960P1



HEAVY DUTY

Rated input power	900 W
Disc diameter	115 mm
No-load speed	11000 rpm
Grinding spindle thread	M 14

GWS 9-115 S
Angle Grinder

0601396171



HEAVY DUTY

Rated input power	900 W
Disc diameter	115 mm
No-load speed	2800 - 11000 rpm
Grinding spindle thread	M 14

GWS 19-125 CIE
Angle Grinder

060179P002



HEAVY DUTY

Rated input power	1900 W
Disc diameter	125 mm
No-load speed	2800 - 11500 rpm
Grinding spindle thread	M 14

GWS 24-230 H
Angle Grinder

06018841P3



HEAVY DUTY

Rated input power	2400 W
Disc diameter	230 mm
No-load speed	6500 rpm
Grinding spindle thread	M 14

GWS 26-230 B
Angle Grinder

0601856303



HEAVY DUTY

Rated input power	2600 W
Disc diameter	230 mm
No-load speed	6500 rpm
Grinding spindle thread	M 14



Concrete Vibrator, Sanding & Grinding



GVC 22 EX
Concrete Vibrator

06012831K1

HEAVY
DUTY



Rated input power	2200 W
Tool length x width	328 x 122.5 mm
Security switch	PRCD
Weight	5.5 Kg
Scope of supply	3.5 m with 35 mm diameter hose

GBR 15 CA
Concrete Grinder

0601776070

HEAVY
DUTY



Rated input power	1500 W
Grinding head diameter	125 mm
No-load speed	9300 rpm
Grinding spindle thread	M 14
Weight	2.6 Kg

Sanding

GEX 125-1 AE
Random Orbit Sander

0601387571

HEAVY
DUTY



Rated input power	250 W
No-load speed	7500 - 12000 rpm
Sanding sheet attachment	Hook-and-loop fastening
Sanding sheet diameter, No. of holes	125 mm, 8 holes
Weight	1.3 Kg



GEX 125-150 AVE
Random Orbit Sander

060137B1P0

HEAVY
DUTY



Rated input power	400 W
No-load speed	5500 - 12000 rpm
Sanding sheet attachment	Hook-and-loop fastening
Sanding sheet diameter, No. of holes	125 / 150 mm, 8 / 6 holes
Weight	2.4 Kg

Dust Extraction & Cleaning

GDE 16 Plus
Dust Extractor

1600A0015Z

HEAVY
DUTY



Compatible with	All 2 Kg SDS plus hammers with 50 mm collar
Drilling diameter	Max. 16 mm, with core cutter max. 82 mm
Maximum drilling depth	120 mm
Weight	520 grams
Materials extracted	Concrete, wood, steel

GAS 12-25 PL
Wet & Dry Extractor

060197C1L0

HEAVY
DUTY



Rated input power	1250 W
Filter surface area	2300 cm²
Container volume, gross	25 l
Weight	9 Kg
Max.air flow rate (turbine)	65 l / s

GBL 800 E
Blower

06019804P0

HEAVY
DUTY



Rated input power	820 W
No-load speed	16000 rpm
Volumetric flow rate	4.5 m³ / min
Weight	2.25 Kg
Scope of supply	Nozzle, dust bag

GHP 5-65
High Pressure Washer

0600910570

HEAVY
DUTY



Rated input power	2400 W
Max. pressure	160 bar
Max. inlet temperature	50°C
Cable, hose length	5 m, 8 m
Max. flow rate	520 l / h

GDE 230 FC-T
Dust Guard

1600A003DM

HEAVY
DUTY



Compatible with	GWS 2200-230 / GWS 24-230 H / GWS 26-230 B
Cutting disc diameter suitability	230 mm
Maximum cutting depth	60 mm
Weight	2.1 Kg
Guard type	Keyless guard

GAS 35 L SFC+
Wet & Dry Extractor

06019C3060

HEAVY
DUTY



Rated input power	1200 W
Filter surface area	6150 cm²
Container volume, gross	35 l
Weight	11.6 Kg
Max.air flow rate (turbine)	74 l / s



GHP 5-75
High Pressure Washer


0600910770

HEAVY
DUTY



Rated input power	2600 W
Max. pressure	185 bar
Max. inlet temperature	50°C
Cable, hose length	5 m, 8 m
Max. flow rate	570 l / h

Accessories

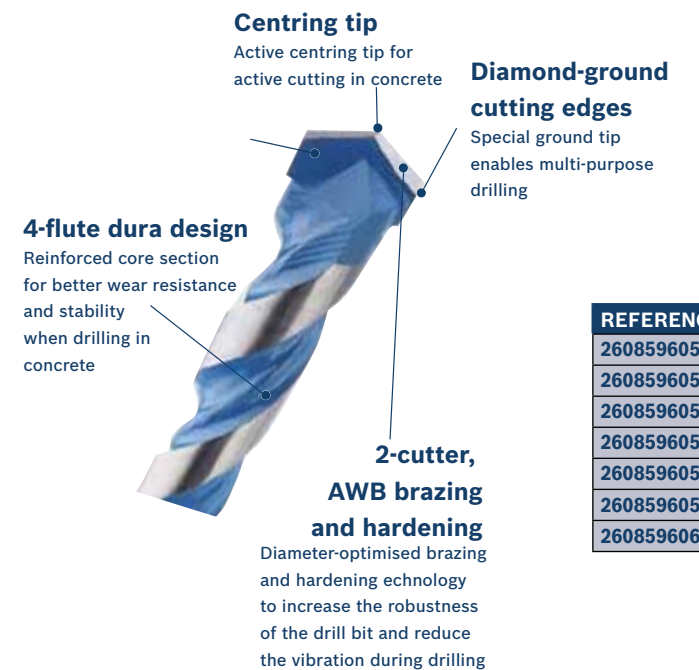

Drill Bits

Diamond drill bits

REFERENCE	DESCRIPTION
2608587143	Easy Dry Best for Ceramic 12 x 33 mm
2608587144	Easy dry best for ceramic 14 x 33 mm

CYL- 3 Concrete drill bits

REFERENCE	DESCRIPTION
2608597660	CYL-3 6 x 60 x 100 mm, d 5,5 mm
2608597663	CYL-3 8 x 80 x 120 mm, d 7,5 mm
2608597665	CYL-3 10 x 80 x 120 mm, d 9 mm
2608597667	CYL-3 12 x 90 x 150 mm, d 10 mm
2608597684	CYL-3 12 x 150 x 200 mm, d 10 mm
2608597688	CYL-3 14 x 250 x 300 mm, d 10 mm

CYL- 9 Tile drill bits

REFERENCE	DESCRIPTION
2608587161	CYL-9 Ceramic 6 x 80 mm
2608587164	CYL-9 Ceramic 8 x 80 mm
2608587165	CYL-9 Ceramic 10 x 90 mm
2608587166	CYL-9 Ceramic 12 x 90 mm
2608587167	CYL-9 Ceramic 14 x 90 mm
2608587168	CYL-9 Ceramic 16 x 90 mm

CYL- 9 Natural Stone Drill bit

REFERENCE	DESCRIPTION
2608589550	CYL-9 NaturalStone, 6X150 mm
2608589541	CYL-9 NaturalStone, 8X150 mm
2608589548	CYL-9 NaturalStone, 10X120 mm
2608589549	CYL-9 NaturalStone, 12X150 mm
2608589544	CYL-9 NaturalStone, 14X150 mm

CYL-9 Multi Construction
Drilling in all kinds
of material

REFERENCE	DESCRIPTION
2608596050	CYL-9 Multi Construction 4 x 40 x 75 mm, d 3,8 mm
2608596051	CYL-9 Multi Construction 5 x 50 x 85 mm, d 4,5 mm
2608596053	CYL-9 Multi Construction 6 x 60 x 100 mm, d 5,5 mm
2608596055	CYL-9 Multi Construction 8 x 80 x 120 mm, d 7,2 mm
2608596057	CYL-9 Multi Construction 10 x 80 x 120 mm, d 9 mm
2608596058	CYL-9 Multi Construction 12 x 90 x 150 mm, d 10 mm
2608596065	CYL-9 Multi Construction 14 x 200 x 250 mm, d 10 mm

Accessories

SDS-Plus-1

REFERENCE	DESCRIPTION
2608680263	SDS-plus-1 6 x 100 x 160 mm
2608680270	SDS-plus-1 8 x 100 x 160 mm
2608680273	SDS-plus-1 10 x 100 x 160 mm
2608680277	SDS-plus-1 12 x 100 x 160 mm
2608680264	SDS-plus-1 5 x 150 x 210 mm
2608680271	SDS-plus-1 8 x 150 x 210mm
2608680278	SDS-plus-1 12 x 150 x 210 mm
2608680285	SDS-plus-1 16 x 150 x 210 mm
2608680279	SDS-plus-1 12 x 200 x 260 mm
2608680283	SDS-plus-1 14 x 200 x 260 mm
2608680286	SDS-plus-1 16 x 250 x 310 mm
2608680288	SDS-plus-1 18 x 200 x 260 mm
2608680290	SDS-plus-1 20 x 200 x 260 mm
2608680280	SDS-plus-1 12 x 400 x 460 mm
2608680284	SDS-plus-1 14 x 400 x 460 mm
2608680287	SDS-plus-1 16 x 400 x 460 mm
2608680289	SDS-plus-1 18 x 400 x 460 mm
2608680291	SDS-plus-1 20 x 400 x 460 mm

SDS-max-7

REFERENCE	DESCRIPTION
2608586738	SDS-max-7 12 x 200 x 340 mm
2608586744	SDS-max-7 14 x 200 x 340 mm
2608586751	SDS-max-7 16 x 200 x 340 mm
2608586758	SDS-max-7 18 x 200 x 340 mm
2608586765	SDS-max-7 20 x 200 x 320 mm
2608586739	SDS-max-7 12 x 400 x 540 mm
2608586745	SDS-max-7 14 x 400 x 540 mm
2608586752	SDS-max-7 16 x 400 x 540 mm
2608586759	SDS-max-7 18 x 400 x 540 mm
2608586766	SDS-max-7 20 x 400 x 520 mm
2608586771	SDS-max-7 22 x 400 x 520 mm
2608586776	SDS-max-7 24 x 400 x 520 mm
2608586778	SDS-max-7 25 x 400 x 520 mm
2608586783	SDS-max-7 26 x 400 x 520 mm
2608586785	SDS-max-7 28 x 400 x 520 mm
2608586790	SDS-max-7 30 x 400 x 520 mm
2608586792	SDS-max-7 32 x 400 x 520 mm
2608586796	SDS-max-7 35 x 400 x 520 mm
2608586802	SDS-max-7 40 x 400 x 520 mm

SDS-Plus-5X

REFERENCE	DESCRIPTION
2608833778	SDS-plus-5X 6 x 100 x 160 mm
2608833789	SDS-plus-5X 8 x 100 x 160 mm
2608833790	SDS-plus-5X 8 x 150 x 210 mm
2608833798	SDS-plus-5X 10 x 100 x 160 mm
2608833800	SDS-plus-5X 10 x 200 x 260 mm
2608833807	SDS-plus-5X 12 x 100 x 160 mm
2608833808	SDS-plus-5X 12 x 150 x 210 mm
2608833809	SDS-plus-5X 12 x 200 x 260 mm
2608833812	SDS-plus-5X 12 x 400 x 460 mm
2608833818	SDS-plus-5X 14 x 200 x 260 mm
2608833825	SDS-plus-5X 16 x 150 x 210 mm
2608833827	SDS-plus-5X 16 x 250 x 310 mm
2608833829	SDS-plus-5X 16 x 400 x 460 mm
1618596260	SDS-plus-5 18 x 400 x 450 mm
1618596263	SDS-plus-5 20 x 400 x 450 mm
1618596233	SDS-plus-5 22 x 400 x 450 mm
2608833912	3-pieces set SDS-plus-5X 6; 8; 10 x 100 x 160 mm

SDS-max-4

REFERENCE	DESCRIPTION
2608685861	SDS-max-4 16 x 400 x 540 mm
2608685863	SDS-max-4 18 x 400 x 540 mm
2608685865	SDS-max-4 20 x 400 x 520 mm
2608685867	SDS-max-4 22 x 400 x 520 mm
2608685869	SDS-max-4 25 x 400 x 520 mm
2608685871	SDS-max-4 28 x 400 x 520 mm
2608685873	SDS-max-4 30 x 400 x 520 mm
2608685875	SDS-max-4 32 x 400 x 520 mm
2608685876	SDS-max-4 35 x 400 x 520 mm
2608685877	SDS-max-4 40 x 400 x 520 mm

SDS-max-9

REFERENCE	DESCRIPTION
1618596507	SDS-max-9 Natural Stone 32 x 800 x 920 mm
F00Y145189	SDS-max-9 core cutter 45 x 80 x 420 mm
F00Y145191	SDS-max-9 core cutter 50 x 80 x 420 mm
F00Y145195	SDS-max-9 core cutter 68 x 80 x 420 mm
2608580521	SDS-max-9 core cutter 68 x 80 x 108 mm



Accessories



Chisels

REFERENCE	DESCRIPTION
2608690145	Pointed chisel SDS-plus 250 mm
2608690144	Flat chisel SDS-plus 250 x 20 mm
2609390576	Pointed chisel, Long Life, SDS-plus 250 mm
2609390394	Flat chisel, Long Life, SDS-plus 250 x 20 mm
2608690142	Pointed chisel SDS-max 400 mm
2608690141	Flat chisel SDS-max 400 x 25 mm
2608690128	Pointed chisel SDS-max 400 mm (10pcs)
2608690125	Flat chisel SDS-max 400 x 25 mm (10pcs)
2608690167	Pointed chisel RTec Speed, SDS-max 400 mm
2608690124	Flat chisel RTec Sharp, SDS-max 400 mm
2608690168	Pointed chisel RTec Speed, SDS-max 400 mm (10pcs)
2608690166	Flat chisel RTec Sharp, SDS-max 400 mm (10pcs)
2608690097	Spade chisel SDS-max 350 x 50 mm
2608690091	Tile chisel SDS-plus 260 x 40 mm
2608690106	Pointed chisel with 28 mm hex shank 400 mm
1618600019	Pointed chisel with 28 mm hex shank 520 mm
2608690108	Flat chisel, 28-mm hex shank 400 x 36 mm
1618600206	Flat chisel, 28-mm hex shank 520 x 36 mm
2608690111	Pointed chisel with 30 mm hex shank 400 mm
2608690112	Flat chisel, 30-mm hex shank 400 x 35 mm

Diamond Cutting Disc Eco

REFERENCE	DESCRIPTION
2608615027	ECO for Universal 115mm x 22.25mm
2608615030	ECO for Universal 180mm x 22.25mm
2608615031	ECO for Universal 230mm x 22.25mm
2608615032	ECO for Universal 300mm x 20mm
2608615033	ECO for Universal 300mm x 25.4mm
2608615034	ECO for Universal 350mm x 20mm
2608615035	ECO for Universal 350mm x 25.4mm



Diamond Cutting Disc Standard

REFERENCE	DESCRIPTION
2608602793	Universal 125 mm x 22,23 mm x 1,6 mm
2608602794	Universal 230 mm x 22,23 mm x 2,3 mm
2608602796	Universal 300 mm x 20,00+25,40 mm x 3,1 mm



Diamond Cutting Disc Professional

REFERENCE	DESCRIPTION
2608600923	Professional for Universal 105 mm x 20,00 mm x 1,6 mm
2608602191	Professional for Universal 115 mm x 22,23 mm x 1,6 mm
2608602192	Professional for Universal 125 mm x 22,23 mm x 1,6 mm
2608602194	Professional for Universal 180 mm x 22,23 mm x 2 mm
2608602195	Professional for Universal 230 mm x 22,23 mm x 2,3 mm
2608602547	Professional for Universal 300 mm x 22,23 mm x 3,1 mm
2608615067	Professional for Universal 300 mm x 22,23 mm x 3,1 mm
2608615068	Professional for Universal 300 mm x 20,00+25,40 mm x 3,1 mm
2608615070	Professional for Universal 350 mm x 20,00 mm x 3,1 mm
2608615071	Professional for Universal 350 mm x 25,40 mm x 3,1 mm
2608602551	Professional for Universal 450mm x 25,40 mm x 3,6 mm
2608602393	Professional for Universal Turbo 115 mm x 22,23 mm x 2 mm
2608602396	Professional for Universal Turbo 180 mm x 22,23 mm x 2,5 mm
2608602397	Professional for Universal Turbo 230 mm x 22,23 mm x 2,5 mm
2608602196	Professional for Concrete 115 mm x 22,23 mm x 1,6 mm
2608602198	Professional for Concrete 150 mm x 22,23 mm x 2,0 mm
2608602199	Professional for Concrete 180 mm x 22,23 mm x 2 mm
2608602200	Professional for Concrete 230 mm x 22,23 mm x 2,3 mm
2608602544	Professional for Concrete 350 mm x 20,00+25,40 mm x 2,8 mm
2608602545	Professional for Concrete 400 mm x 20,00+25,40 mm x 3,2 mm
2608602201	Professional for Ceramic 115 mm x 22,23 mm x 1,6 mm



Accessories



Diamond Cutting Disc Professional

REFERENCE	DESCRIPTION
2608602202	Professional for Ceramic 125 mm x 22,23 mm x 1,6 mm
2608602204	Professional for Ceramic 180 mm x 22,23 mm x 1,6 mm
2608602205	Professional for Ceramic 230 mm x 22,23 mm x 1,6 mm
2608602282	Professional for Marble 115 mm x 22,23 mm x 2,2 mm
2608602283	Professional for Marble 230 mm x 22,23 mm x 2,8 mm
2608602597	Professional for Stone 115 mm x 22,23 mm x 1,6 mm
2608602600	Professional for Stone 180 mm x 22,23 mm x 2 mm
2608602601	Professional for Stone 230 mm x 22,23 mm x 2,3 mm
2608602602	Professional for Stone 300 mm x 20,00+25,40 mm x 3,1 mm
2608602603	Professional for Stone 350 mm x 20,00+25,40 mm x 3,1 mm
2608602625	Professional for Asphalt 350 mm x 20,00+25,40 mm x 3,2 mm
2608602626	Professional for Asphalt 400 mm x 20,00 / 25,40 mm x 3,6 mm
2608602627	Professional for Asphalt 450mm x 20,00 / 25,40 mm x 3,2 mm

Diamond Cutting Disc Expert

REFERENCE	DESCRIPTION
2608602571	Expert for Universal 350 mm x 20 / 25,40 mm x 3,2 mm
2608602572	Expert for Universal 400 mm x 20 / 25,40 mm x 3,2 mm

Diamond Grinding Head

REFERENCE	DESCRIPTION
2608603313	Standard for Concrete Turbo 105 x 22.23 x3 mm
2608601573	Standard for Concrete 125 x 22.23 x 5 mm
2608601574	Standard for Universal Turbo 125 x 22.23 x 5 mm

Diamond Wet Core Cutter Best

REFERENCE	DESCRIPTION
2608601349	G 1/2" Best for Concrete 24 mm, 300 mm, Ring, 10 mm
2608601359	1 1/4" UNC Best for Concrete 52 mm, 450 mm, 5 segments, 11.5 mm
2608601364	1 1/4" UNC Best for Concrete 82 mm, 450 mm, 7 segments, 11.5 mm
2608601368	1 1/4" UNC Best for Concrete 112 mm, 450 mm, 9 segments, 11.5 mm
2608601370	1 1/4" UNC Best for Concrete 127 mm, 450 mm, 11 segments, 11.5 mm
2608601373	1 1/4" UNC Best for Concrete 152 mm, 450 mm, 12 segments, 11.5 mm
2608601374	1 1/4" UNC Best for Concrete 162 mm, 450 mm, 12 segments, 11.5 mm
2608601375	1 1/4" UNC Best for Concrete 182 mm, 450 mm, 12 segments, 11.5 mm
2608601376	1 1/4" UNC Best for Concrete 182 mm, 450 mm, 13 segments, 11.5 mm
2608601378	1 1/4" UNC Best for Concrete 202 mm, 450 mm, 14, 11.5 mm
2608601381	1 1/4" UNC Best for Concrete 250 mm, 450 mm, 16, 11.5 mm

Concrete Vibrator Hose

REFERENCE	DESCRIPTION
F000600494	GVC 22 EX - Hose 35mm x 1.5m (GVC 22 EX)
F000600390	GVC 22 EX - Hose 35mm x 3.5m (GVC 22 EX)

Others

REFERENCE	DESCRIPTION
2607000745	Fixing Set (Brick) 20 mm
2608002000	Fixing Set (Concrete) 16 mm
2608002001	Wall plugs 50 pcs Set (Concrete) 16 mm
1608571048	Keyed chucks up to 13 mm 1.5–13 mm, 1 / 2" - 20
1608571062	Keyed chucks up to 13 mm 1.5–13 mm, 1 / 2" - 20
1608571056	Keyed chucks up to 16 mm 3 – 16 mm, 5 / 8" - 16
2608572212	Keyless chuck with adapter 1.5 – 13 mm, SDS-plus
2608572213	SDS-plus keyless chuck SDS-plus
1618598159	Drill bit adapters for drill bits SDS-max, SDS-plus
1610795007	Transport cart for USH / GSH 27

Measuring Tools

GLM 20
Laser Measure

0601072EG0



Measurement range	0.15 - 20 m
Measurement accuracy, typical	±3 mm
Power supply	2 x 1.5 V (AAA) batteries
Units of measurement	m, ft / inch
Laser class	2

GLM 50 C
Laser Measure

0601072C00



Measurement range	0.05-50m
Measurement accuracy, typical	±1.5mm
Power supply	2 x 1.5 V (AAA) batteries
Units of measurement	m / cm, ft / inch
Dust and splash protection	IP 54

GLM 120 C
Laser Measure

0601072F70



Measurement range	0.08 - 120 m
Measurement accuracy, typical	±1.5mm
Power supply	built-in 1 x 3.6 V Li-ion battery (3120 mAh)
Units of measurement	m / cm / mm, ft, inch, ft-inch
Dust and splash protection	IP 54

GLM 250 VF
Laser Measure

061599402J



Measurement range	0.05 - 250 m
Measurement accuracy, typical	±1 mm
Power supply	4 x 1.5 V (AA) batteries
Units of measurement	m / cm / mm
Dust and splash protection	IP 54

GLM 40
Laser Measure

0601072900



Measurement range	0.15 - 40 m
Measurement accuracy, typical	±1.5 mm
Power supply	2 x 1.5 V (AAA) batteries
Units of measurement	m, ft / inch
Dust and splash protection	IP 54

GLM 80
Laser Measure

0601072370



Measurement range	0.05 - 80 m
Measurement accuracy, typical	±1.5mm
Power supply	built-in 1 x 3.6 V Li-ion battery (1250 mAh)
Units of measurement	m / cm / mm
Dust and splash protection	IP 54

THE SMART WAY TO MEASURE

Bosch Professional Measuring Tools.

Measuring Tools

GWM 32
Measuring Wheel

0601074000



Wheel diameter	32 cm
Max. measured value	999.9 m
Material	Aluminium
Measurement accuracy	±1 dm / 100 m
Weight	1.4 Kg

GLL 3-15 X
Line Laser

0601063M00



Working range	15 m
Accuracy	±0.2 mm / m
Power supply	4 x 1.5 V (AA) batteries
Self-levelling range	±3°
Tripod thread	5 / 8"

GLL 5-50 X
Line Laser

0601063N00



Working range / with receiver	15 / 50 m
Accuracy	±0.2 mm / m
Power supply	4 x 1.5 V (AA) batteries
Self-levelling range	±3°
Tripod thread	5 / 8"

GLL 3-80 G
Line Laser

0601063Y00



Working range / with receiver	30 / 120 m
Accuracy	±0.2 mm / m
Power supply	4 x 1.5 V (AA) batteries
Self-levelling range	±4°
Tripod thread	1 / 4", 5 / 8"

GLL 2
Line Laser

0601063A01



Working range	Up to 10 m
Accuracy	±0.5 mm / m
Power supply	2 x 1.5 V (AA) batteries
Self-levelling range	±4°
Tripod thread	1 / 4"

GLL 2-20
Line Laser

0601063J00



Working range	20 m
Accuracy	±0.4 mm / m
Power supply	4 x 1.5 V (AA) batteries
Self-levelling range	±4°
Tripod thread	1 / 4"

GLL 3-80
Line Laser

0601063S00



Working range / with receiver	30 / 120 m
Accuracy	±0.2 mm / m
Power supply	4 x 1.5 V (AA) batteries
Self-levelling range	±4°
Tripod thread	1 / 4", 5 / 8"



Measuring Tools

GCL 2-50 C + kit
Combi-Laser

0601066G70



Working range / with receiver	20 / 50 m
Accuracy	±0.3 mm / m
Power supply	4 x 1.5 V (AA) batteries
Self-levelling range	±4°
Tripod thread	1 / 4", 5 / 8"

GIM 60
Digital Inclinometer

0601076700



Measurement range	0-360° (4x90°)
Length	60 cm
Masurement accuracy, vials	±0.057° = ±1 mm / m
Power supply	4 x 1.5 V (AA) batteries
Weight	0.77 Kg

GAM 220 MF
Angle Mesurer

0601076600



Measurement range	0 - 220°
Measurement accuracy, angles	±0.1°
Power supply	4 x 1.5 V (AA) batteries
Weight	1.2 Kg
Dust and splash protection	IP 54

GMS 120
Detector

0601081000



Detectable materials	Ferrous & non-ferrous metals, wooden studs, live cables
Max. detection depth, steel	120 mm
Max. detection depth, copper	80 mm
Max. detection depth, wooden beam	38 mm
Max. detection depth, live cables	50 mm

GRL 300 HV
Rotation Laser

0601061501



Working range / with receiver	60 / 300 m (Diameter)
Accuracy	±0.1 mm / m
Self-levelling range	±5° (8%)
Tripod thread	5 / 8"
Scope of supply	LR 1, laser viewing glasses, laser target, WM 4 Professional universal mount, RC 1 professional remote control

GIM 120
Digital Inclinometer

0601076800



Measurement range	0-360° (4x90°)
Length	120 cm
Masurement accuracy, vials	±0.057° = ±1 mm / m
Power supply	4 x 1.5 V (AA) batteries
Weight	1.3 Kg

GOL 32 D
Optical level

0601068502



Units of measurement, magnification	360 degrees, 32 x
Accuracy	1 mm at 30 m
Working range, value	120 m
Tripod thread	5 / 8"
Scope of supply	BT 160 Tripod stand + GR 500

D-TECT 150
Wall Scanner

0601010005



Detectable materials	Plastic pipes, ferrous & non-ferrous metals, wooden studs, live cables
Max. detection depth, steel	150 mm
Max. detection depth, copper	150 mm
Max. detection depth, plastic pipes	80 mm
Max. detection depth, live cables	60 mm

Product Name	Carbon brush	Electron. Module	Switch	Armature	Motor	Field coil
GSB 120-LI	-	2609125169	-	-	2609199428	-
GSB 180-LI + 23 accessories	1607000CZ1	2607202346	-	-	160702266N	-
GBH 180-LI	1619P14345	1600A00F9H	-	1619P14346	1619P13742	-
GSB 570	1619PB4810	-	1619PB4804	1619PB4803	-	1619PB4802
GSB 1300 / 550	1619PA1407	-	1619PA0679	1619PA0697	-	1619PA0678
GSB 550 + 75 accessories	-	-	-		-	-
GSB 550 + 90 accessories	-	-	-		-	-
GBH 2-20 DRE	1617014146	-	1617200542	1619P09818	-	1619P08313
GSH 500	1617014138	-	1619P08754	1619P15121	-	1619P14780
GWS 2000-180	1607014171	-	1619P14186	1604011252	-	1604220380
GWS 2000-230 + CB	1607014171	-	1619P14186	1604011252	-	1604220380
GWS 2200-180	1607014171	-	1607000971	1619P15296	-	1604220380
GWS 2200-230	1607014171	-	1607000971	1619P15296	-	1604220380
GWS 700	1619P07571	-	1607200179	1619P01844	-	1619P12316
GDC 140	1619P20377	-	1619P20376	1619P20452	-	1619P20361
GSS 140	1619PB3111	-	160720035P	1604010B9N	-	1604220577
GSS 2300	1619PA7635	-	1619PA7631	1619PA7629	-	1619PA7627
GAS 15	1619PA7345	-	1619PA7289	-	-	-
GBL 620	1604321129	-	2607200637	1604010BA6	-	160422056J
GSB 18V-50	-	16072335FX	-	-	1607000DM8	-
GSB 18V-60 C	-	16072335D9	-	-	2609199894	-
GBH 18V-26 F	-	-	160723359J	1600A00AR1	-	-
GWS 18V-LI	-	-	1619P11912	1619P11898	-	-
GLI 18V-300	-	-	-		-	-
GSB 13 RE + accessories	2610391290	-	2607200567	2609120232	-	2604220718
GSB 16 RE + accessories	2607014013	-	2607200625	2609120235	-	2604220647
GSB 20-2 RE	1617000525	-	1607200508	2609199451	-	2609120463
GSB 24-2	1617000525	-	160720032L	2604011401	-	2604220727
GSB 162-2 RE	2604321947	-	2607200675	1600A004L1	-	1619P08345
GBH 2-24 DRE	1617000525	-	160720032D	1619P13450	-	1619P11998
GBH 2-24 DFR	1617000525	-	160720032D	1619P13450	-	1619P11998
GBH 2-26 F	1617000525	-	1617200532	1614010709	-	1614220117
GBH 2-28 F	1617000525	-	160720032G	1614010262	-	1614220208
GBH 4-32 DFR	1614321079	-	1617200127	1614010252	-	1619P08340
GBH 5-40 D	1617014138	-	1619P10396	1619P10769	-	1619P08323
GBH 8-45 DV	1617014145	-	1617200130	1614010267	-	1614220124
GBH 12-52 DV	1607000C3Z	-	1617200130	1607000C3Y	-	160422023P
GSH 11 E	1617014126	-	1617200048	1614011072	-	160422052J
GSH 11 E + 4 Chisels	1617014126	-	1617200048	1614011072	-	160422052J
GSH 16-28	-	-	-	-	-	-
GSH 27 VC	-	-	-	-	-	-
GDB 180	160701417L	-	1607200329	1600A004XW	-	1604220538
GCR 180	-	-	-	-	-	-
GWS 750-115 + CB	1619P11715	-	2609125169	1619P08234	-	1619P08334
GWS 9-115	1619P11715	-	160720031Y	1619P10952	-	1619P10953
GWS 9-115 S	1619P11715	-	160720031Y	1619P10952	-	1619P10953
GWS 19-125 CIE	1607000V37	-	160720035A	1600A00D2N	-	160422053W
GWS 24-230 H	1607014171	-	1607000967	1604011304	-	1604220467
GWS 26-230 B	1607014171	-	1607000967	1604011932	-	160422051P
GNF 35 CA	3607014010	-	1607200150	1604010654	-	1604220284
GVC 22 EX	F000611090	-	F000600372	F000605241	-	F000607182
GBR 15 CA	1607000V37	-	1607200256	3607031750	-	1604220478
GEX 125-1 AE	2609120199	-	1607200190	2609199164	-	2604220743
GEX 125-150 AVE	1607014117	-	2607200688	2604011434	-	2604220743
GDE 16 Plus	-	-	-	-	-	-
GDE 230 FC-T	-	-	-	-	-	-
GAS 12-25 PL	-	-	1619PB3262	-	-	1619PB3212
GAS 35 L SFC+	-	-	2609200479	-	-	-
GBL 800 E	1604321129	-	2607200637	1604010B1E	-	1604220439
GHP 5-65	F016L73067	-	-	-	-	-
GHP 5-75	F016L72087	-	-	-	-	-



BOSCH

LET US TAKE CARE OF YOUR TOOL

Safe, Conscientious and Fast: Repairs by Bosch

Pickup and
drop-off
arrangement



Robert Bosch East Africa Ltd.
Power Tools Division
Fedha Plaza, Ground Floor
Mpaka Road-Westlands, Nairobi
Sales: 0799 447 117

Dealer Stamp

