



BOSCH



Measuring Tools Catalogue

Professional blue measuring tools

Nguvu Mkononi na Bosch!



BOSCH

THE SMART WAY TO MEASURE.

Easy and compact for professionals.

GLM 20 Professional Digital Tape Measure.



Tool Index

Product Name	Order Number
Distance Measurement	
GLM 20 Professional	0601072EG0
GLM 40 Professional	0601072900
GLM 50 - 22 Professional	0601072S00
GLM 50 - 25 G Professional	0601072V00
GLM 100 - 25 C Professional	0601072Y00
GLM 120 C Professional	0601072F70
GWM 32 Professional Measuring Wheel	0601074000
Digital Inclinometers and Angle Measurer	
GIM 60 Professional Digital Inclinator	0601076700
GIM 120 Professional Digital Inclinator	0601076800
GAM 220 MF Professional Angle Measurer	0601076600
Line Lasers	
GLL 2 Professional	0601063A01
GLL 2-15 G Professional	0601063W00
GLL 3-15 X Professional	0601063M00
GLL 2-20 G Professional	0601065000
GCL 2-50 G Professional	0601066M00
GLL 5-50 X Professional	0601063N00
GLL 3-80 Professional	0601063S00
GLL 3-80 G Professional	0601063Y00
Rotation Laser	
GRL 300 HV set Professional (with receiver)	0601061501
GRL 600 CHV Professional	0601061F70
Optical Level / Dumpy Level	
GOL 32 D Professional + BT 160 Prof + GR 500 Prof Kit	0601068502
Detector, Inspection Camera, Thermo Detector and Thermo Camera	
GMS 120 Professional Detector	0601081000
D-tect 200 C Professional Wallscanner	0601081600
GIC 120 C Professional Inspection Camera	0601241200
GTC 400 C Professional Thermo Camera	0601083171
Accessories	
LR 1 Professional Laser Receiver	0601015400
LR 2 Professional Laser Receiver	0601069100
LR 6 Professional Laser Receiver	0601069H00
LR 7 Professional Laser Receiver	0601069J00
BT 150 Professional Building Tripod	0601096B00
BT 160 Professional Building Tripod	0601091200
BT 300 HD Professional Building Tripod	0601091400
BM 1 Professional Universal Mount	0601015A01

Laser Measure GLM 20 Professional



Easy, compact, for professionals

- 01 One button for everything - intuitive and easy measuring
- 02 Compact - easily fits into any pocket



Technical data 0.13 kg

Order number: 0 601 072 ...

Units of measurement: **m/cm. ft/inch**

Measurement range: **0.15 – 20.00**

Length: **100 mm**

Width: **36 mm**

Height: **23 mm**

Measurement time, typical: **< 0.5 s**

Measurement time, max.: **4 s**

Laser diode: **635 nm. < 1 mW**

Laser class: **2**

Measurement accuracy, typical: **+/- 3.0 mm**

Power supply: **2 x 1.5 V LR03 (AAA)**

Automatic deactivation: **5 min.**

Scope of supply ...EGO


- 2 x 1.5 V LR03 (AAA) batteries ✓
- Manufacturer's certificate ✓

Laser Measure GLM 40 Professional



All relevant functions in a compact design

- 01 Distance measurement, area calculation, volume calculation – all intuitive to use
- 02 Illuminated, three-line display maximises readability
- 03 Memory function enables easy access to the last ten measurements



Technical data 0.09 kg

Order number: 0 601 072 ...

Units of measurement: **m/cm. ft/inch**

Measurement range: **0.15 – 40.00**

Length: **105 mm**

Width: **41 mm**

Height: **24 mm**

Measurement time, typical: **< 0.5 s**

Measurement time, max.: **4 s**

Laser diode: **635 nm. < 1 mW**

Laser class: **2**

Measurement accuracy, typical: **+/- 1.5 mm**

Power supply: **2 x 1.5 V LR03 (AAA)**

Automatic deactivation: **5 min.**

Scope of supply ... 900

- 2 x 1.5 V LR03 (AAA) batteries ✓
- Manufacturer's certificate ✓
- Protective bag ✓

Laser Measure

GLM 50-22 Professional

New!



Robust design to withstand rough jobsites

- 01 Robust Design to Withstand Rough Jobsites
Reinforced housing for brutal applications + IP 65 protection.
- 02 Increased Battery Runtime (vs. GLM 50 C)
due to 2 x AA battery source + optimized hardware & software.
- 03 Favourite Button for individual user preference:
Customizable button for a shortcut to a specific measuring function or setting.
- 04 Big Numbers Mode for fast and easy readability: Large measurement result, fading out everything else on the display.



Technical data - 10 °C to + 45 °C 0.17 kg

Order number: 0 601 072 ...

Units of measurement: **m (default) / cm / mm / ft / inch**

Measurement range: **0.05 – 50.00**

Length: **119 mm**

Width: **53 mm**

Height: **29 mm**

Dust & Water Protection: **IP 65**

Power Supply: **2 x AA Batteries**

Laser diode: **635 nm, < 1 mW**

Laser class: **2**

Measurement accuracy, typical: **+/- 1.5 mm**

Scope of supply ... S00

Manufacturer's certificate	✓
Protective bag	✓

Laser Measure

GLM 50-25 G Professional

New!



Greater visibility for even faster and easier targeting

- 01 Greater Visibility for Even Faster Targeting
Green laser that can be seen better than red laser.
- 02 Robust Design to Withstand Rough Jobsites
Reinforced housing for brutal applications + IP 65 protection.
- 03 Increased Battery Runtime (vs. GLM 50 C)
due to 2 x AA battery source + optimized hardware & software.
- 04 Vibration Feedback
for successful and failed measurement. Great if display is out of sight, or on loud construction sites.



Technical data - 10 °C to + 45 °C 0.17 kg

Order number: 0 601 072 ...

Units of measurement: **m (default) / cm / mm / ft / inch**

Measurement range: **0.05 – 50.00**

Length: **119 mm**

Width: **53 mm**

Height: **29 mm**

Dust & Water Protection: **IP 65**

Power Supply: **2 x AA Batteries**

Laser diode: **515 nm, < 1 mW**

Laser class: **2**

Measurement accuracy, typical: **+/- 1.5 mm**

Scope of supply ... V00

Manufacturer's certificate	✓
Protective bag	✓

Laser Measure

GLM 100-25 C Professional



Versatile entry price outdoor laser measure with real outdoor capability

- 01 Digital Viewfinder with Zoom Function for precision over large distances, outdoors and in complex surroundings.
- 02 High-Contrast IPS Colour Display provides optimal readability.
- 03 Fast and Easy Documentation
Transfer of measurements via Bluetooth to new MeasureOn App.
- 04 Scratch Resistant Cover Glass and IP 54 for demanding jobsites.



Technical data - 10 °C to + 45 °C 0.23kg

Order number: 0 601 072 ...

Units of measurement: **m/cm/mm/ft/inch/ft-inch**

Measurement range: **0.08 – 100.00m**

Dimensions: **142 (176 w/ pin) x 64 x 28 mm**

Power supply: **3 x 1,5 V – LR6 (AA)**

Measuring Accuracy: **± 1.5 mm**

Dust & Water Protection: **IP 54**

Laser diode: **650 nm, < 1 mW**

Laser class: **2**

Scope of supply ...Y00

3 x AA Batteries	✓
Manufacturer's certificate	✓
Hand Strap (1600A014BT)	✓
Protective bag	✓

Laser Measure

GLM 120 C Professional



The smart solution for measuring and documenting surroundings, even outdoors

- 01 Digital viewfinder with zoom function allows for precision over large distances, outdoors and in complex surroundings
- 02 High-contrast IPS colour display provides optimal readability
- 03 Remote controlling for rapid measurements



Technical data ± 0.2° 0.21kg

Order number: 0 601 072 ...

Units of measurement: **m/cm/mm/ft/inch/ft-inch**

Measurement range: **0.08 – 120.00m**

Weight, approx.*: **0.21kg**

Power supply: **1 x 3.6 V Li-Ion battery (3120 mAh)**

Measurement time, typical: **< 0.5 s**

Measurement time, max.: **4 s**

Laser diode: **650 nm, < 1 mW**

Laser class: **2**

Scope of supply ...F70

Charger (2 609 120 421)	✓
Manufacturer's certificate	✓
Micro USB cable /Micro USB Charger	✓
Protective bag	✓

Measuring Wheel **GWM 32** Professional



The lightweight, handy measuring wheel

- 01 Ergonomic pistol grip and lightweight aluminium construction for ease of use
- 02 Telescopic shaft with continuously variable height adjustment for more flexibility and comfort
- 03 Die-cast aluminium wheel with robust rubber tread for use on any surface


Other features

- Precise counter in impact-resistant plastic housing
- PTB certified



Technical data	1.4 kg
Order number: 0 601 074 ...	
Material: Aluminium	
Wheel diameter (circumference): 318.5 mm (1 m)	
Measurement accuracy ± 1 dm/100 m	
Max. measured value: 9999.9	
Scope of supply	...000
Protective bag	✓

Digital Inclinator **GIM 60** Professional

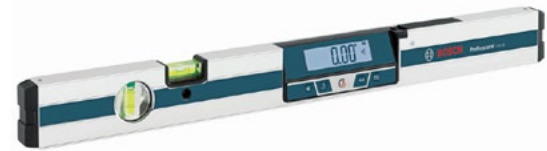

Precise digital inclinometer

- 01 Measures precise tilts in degrees, percent or millimetres/metres
- 02 Alignment arrows that help users adjust while levelling
- 03 Display automatically rotates for ease of use

Other features

- Audible signal at 0° and 90°
- Easy calibration function for sustained accuracy



Technical data	0.7 kg
Order number: 0 601 076 ...	
Width: 27 mm	
Height: 59 mm	
Weight approx.: 0.7 kg	
Length: 608 mm	
Measurement range: 0 – 360° (4 x 90°)	
Electronics measurement accuracy 0°/90°: $\pm 0.05^\circ$	
Measurement accuracy, vials: $\pm 0.057^\circ = \pm 1$ mm/m	
Electronics measurement accuracy at 1°-89°: $\pm 0.2^\circ$	
Scope of supply	... 700
4 x 1.2 V (AA) batteries	✓
Protective bag	✓

Angle Measurer

GAM 220 MF Professional



Precise and easy angle measurement

- 01 Rapid calculation and transfer of angles by means of memory function for frequently used angle dimensions
- 02 Automatic calculation of single and double mitre angles without any other tools

Other features

- Optimum readability due to rotating, illuminated display



Technical data 1.2 kg

Order number: 0 601 076 ...

Length: 446 mm

Width: 52 mm

Height: 60 mm

Measurement range: 0 – 220°

Measurement accuracy, angles: $\pm 0.1^\circ$

Measurement accuracy, vials: $\pm 0.05^\circ$

Power supply: 4x 1.5 V R6 (AAA)

Automatic deactivation facility, approx.: 30 mins

Weight, approx.: 1.2 kg

Arm length: 40 cm

Scope of supply ... 600

4 x 1.5 V (AAA) batteries	✓
Protective bag	✓

Line Laser

GLL 2 Professional



The compact cross line laser for professionals

- 01 Small, lightweight, always within reach
- 02 Easy handling due to single-button operation
- 03 For flexible use: with multifunctional mount for versatile fixing possibilities

Other features

- Horizontal, vertical and cross-line modes – project two lines independently or together for a wide array of level and/or alignment application
- Smart Pendulum System – self-levels and indicates out-of-level position
- Manual mode – locks the line and sets the level at any desired angle



Technical data 0.28 kg

Order number: 0 601 063 ...

Power supply: 2 x 1.5 V LR6 (AA)

Working range up to: 10 m

Accuracy: ± 0.5 mm/m

Self-levelling range: $\pm 4^\circ$

Laser class 2

Scope of supply ... A01

2 x 1.5 V (AA) batteries	✓
Protective bag	✓
Universal mount MM 2	✓

Line Laser

GLL 2-15 G Professional

GREENLASER
Technology

New!



Durability and ease of use. Green laser lines

- 01 Easy to adjust thanks to intuitive operation
- 02 ON/OFF switch and one-button keypad make for ease of use
- 03 Green laser for enhanced horizontal and vertical line visibility

Other features

- Durable design, featuring a rubberised housing with recessed glasses and dust and splash water protection IP 64 to withstand tough environments



Technical data 0.57 kg

Order number: 0 601 063 ...

Power supply: **4 x 1.5 V LR6 (AA)**

Working range up to **15 m**

Accuracy: **± 0.3 mm/m**

Self-levelling range: **± 4°**

Laser class **2**

Scope of supply ...W00

4 x 1.5 V (AA) batteries	✓
Protective bag / pouch	✓
Universal mount LB 10	✓


Line Laser

GLL 3-15 X Professional



For easy decorative interior fitting applications

- 01 Maximum precision thanks to the Bosch Pendulum Precision System
- 02 Projection of a vertical and a horizontal line
- 03 Detachable, 360° rotating platform with bubble vial and fine adjustment



Technical data 0.72 kg

Order number: 0 601 063 ...

Power supply: **4 x 1.5 V LR6 (AA)**

Working range: up to **15 m**

Accuracy: **± 0.2 mm/m**

Self-levelling range: **± 3°**

Laser class: **2**

Projection: **3 lines + 1 plumb point**

Colour of laser line: **red**

Scope of supply ...M00

4 x 1.5 V (AA) batteries	✓
Protective bag	✓
Trpod adapter	✓

Line Laser

GLL 2-20 G Professional



The tough, green laser solution

- 01 Durable design with IP 64 dust and splash water protection for tough environments.
- 02 Green laser lines for high visibility.
- 03 One horizontal 360 degree line for high work efficiency and less repositioning.
- 04 Strong magnets on the LB 10 mount for fast and secure mounting.



Technical data

0.62 kg

Order number: 0 601 065 ...

Working range (radius): **up to 10 m**

Laser configuration: **1x vertical line and 1x 360° horizontal line**

Accuracy: **±0.4 mm/m*** (*plus use-dependent deviation)

Self-levelling range: **± 4°**

Self-levelling time: **< 4 seconds**

IP: **64**

Colour of laser line: **green**

Scope of supply

...000

4 x 1.5 V (AA) batteries	✓
Protective bag	✓
Green target plate	✓
Mount LB 10 & Clip DK 10 0601092C00	✓

Combi - Laser

GCL 2-50 G Professional



Durability and ease of use. Green laser lines and green plumb points

- 01 Durable design, featuring a rubberised housing with recessed glasses and dust and splash water protection IP 64 to withstand tough environments
- 02 ON/OFF switch and one-button keypad make for ease of use
- 03 Green laser lines and green plumb points provide enhanced visibility

Other features

- ▶ Horizontal and vertical laser lines and two centred plumb points with optimal visibility
- ▶ Versatile to use with rotating multifunctional mount for a variety of mounting possibilities



Technical data

0.58 kg

Order number: 0 601 066 ...

Working range: **up to 15 m**

Working range with receiver: **50m**

Accuracy: **± 0.3 mm/m**

Self-levelling range: **± 4°**

Compatible laser receiver: **LR 7**

Projection: **2 lines / 2 points**

Colour of laser line: **green**

Scope of supply

...M00

4 x 1.5 V (AA) batteries	✓
Protective bag	✓
Tripod adapter	✓
Rotating Mount RM 10 Professional 0 601 092 A00	✓

Line Laser

GLL 5-50 X Professional



Better line visibility for increased work efficiency in everyday interior levelling jobs

- 01 Greater Visibility - On front cross for better working performance
- 02 Compact - Light and easy-to-carry
- 03 Robust - Thanks to the highly sophisticated Bosch pendulum precision system (PPS) which further enhances tool protection and levelling accuracy



Technical data 0.5 kg

Order number: 0 601 063 ...

Power supply: 4 x 1.5 V LR6 (AA)

Working range: 15 m

Working range with receiver: 50m

Accuracy: ± 0.2 mm/m

Self-levelling range: $\pm 3^\circ$

Laser class: 2

Projection: 5 lines + 1 plumb point

Compatible laser receiver: LR 6

Colour of laser line: red

Scope of supply ...N00

4 x 1.5 V (AA) batteries	✓
Protective bag	✓
Tripod adapter (SP no. 1 609 203 C10)	✓

Line Laser

GLL 3-80 Professional



3 x 360° for visibility on a new level

- 01 High visual clarity is provided by high-powered diodes
- 02 Intuitive user interface offers easy operation
- 03 3 x 360° lines allow for simultaneous horizontal and vertical levelling applications for highly efficient work



Technical data 0.82 kg

Order number: 0 601 063 ...

Power supply: 4 x 1.5 V LR6 (AA)

Working range: 30 m

Working range with receiver: 120m

Accuracy: ± 0.3 mm/m

Self-levelling range: $\pm 4^\circ$

Laser class: 2

Projection: 3 x 360° line

Compatible laser receiver: LR 6 + 7

Colour of laser line: red

Scope of supply ...S00

4 x 1.5 V (AA) batteries	✓
Carrying case	✓
Laser target plate	✓

Line Laser

GLL 3-80 G Professional



GREENLASER
Technology



New!

3 x 360° bold green lines for optimal visibility.

- 01 Bright green laser lines offer up to four times better visibility than red lines
- 02 Perfect for simultaneous horizontal and vertical levelling applications thanks to three lines, for highly efficient work
- 03 Intuitive user interface makes it easy to operate



Technical data 0.82 kg

Order number: 0 601 063 ...

Power supply: **4 x 1.5 V LR6 (AA)**

Working range: **30 m**

Working range with receiver: **120m**

Accuracy: **± 0.3 mm/m**

Self-levelling range: **± 4°**

Laser class: **2**

Projection: **3 x 360° line**

Compatible laser receiver: **LR 7**

Colour of laser line: **green**

Scope of supply ...Y00

4 x 1.5 V (AA) batteries	✓
Carrying case	✓
Laser target plate	✓

Rotation Laser

GRL 300 HV Professional



Easy handling with horizontal and vertical self-levelling

- 01 Easy to operate thanks to one button per function, and self-explanatory display
- 02 Easy to set up in both the horizontal and vertical modes due to automatic self-levelling of 8% (± 5°)
- 03 The shock warning function, which can be switched on and off, prevents levelling errors in the event of shocks and vibrations



Technical data 1.8 kg

Order number: 0 601 061 ...

Scope of supply ... 501

1 x 1.5 V LR6 (AA) battery	✓
1 x 9 V 6LR61 (block) battery	✓
1 x NiMH battery (SP no. 1 608 M00 05G)	✓
2 x 1.5 V LR20 (D)	✓
Battery compartment (SP no. 1 608 M00 05D)	✓
Carrying case (SP no. 1 608 M00 05F)	✓
Charger set with adapter (SP no. 1 600 A00 1W3)	✓
Holder also available separately as an accessory (SP no. 1 608 M00 70F)	✓
Laser Receiver LR 1 Professional (0 601 015 400)	✓
Laser target (red) (SP no. 1 608 M00 05C)	✓
Laser viewing glasses (red) (SP no. 1 608 M00 05B)	✓
RC1 Professional remote control (0 601 069 900)	✓
WM 4 Professional universal mount (0 601 092 400)	✓

Rotation Laser

GRL 600 CHV Professional



Get accurate results and save time with the new GRL 600 CHV – perfect for heavy-duty jobs

- 01 Highly flexible in bad weather with robust design, impact protection, and IP68 rating against dust and water
- 02 Intuitive via screen and access to levelling remote app that visualises all functions including dual slope setting to save time
- 03 Conveniently long runtime both with 18V battery system and alkaline batteries (adapter included)



Technical data	4.6 kg
Order number: 0601061	
Scope of supply	... F70
Laser Receiver LR 1 Professional 0 601 069 P00	✓
Receiver brack RB 60 Professional	✓
Remote control RC 6 Professional	✓
1 x battery ProCORE18V 4.0Ah 1 600 A01 6GB	✓
Quick charger GAL 18V-40 Professional 1 600 A01 9RJ	✓
Battery adapter BA 1 Professional	✓
Wall mount WM 6 Professional	✓
4 x 1.5 V LR20 battery (D)	✓
4 x 1.5 V LR6 battery (AA)	✓
Laser target plate	✓
Laser viewing glasses (red) (spare part number 1 608 M00 05B)	✓
Carrying case	✓

Optical Level

GOL 32 D Professional



Robust and reliable – ideal for outdoor use

- 01 Ideal for outdoor use due to a robust housing with dust and splash protection (IP54)
- 02 Fast aperture for a sharp image of the target
- 03 Compensator lock for safe transport



Technical data	1.5 kg
Order number: 0 601 068 ...	
Length: 215 mm	
Width: 135 mm	
Height: 145 mm	
Accuracy: 1 mm at 30 m	
Dust and splash protection: IP 54	
Weight, approx.: 1.5 kg	
Tripod thread: 5/8"	
Unit of measure: 360 degrees	
Magnification: 32 x	
Scope of supply	... 502
Adjusting pin	✓
Hex key	✓
BT 160 Professional tripod (0 601 091 200)	✓
GR 500 levelling staff (0 601 094 300)	✓
Lens cover	✓
Plumb bob	✓

Detector

GMS 120 Professional



Simple and intuitive – the logical favourite for locating objects effectively

- 01 Automatic calibration avoids application errors for more reliable and confident work
- 02 Locate metal and live wire in various wall types as well as wooden substructures in drywall
- 03 Even more reliable detection of objects due to three-colour LED luminous ring



Technical data

0.27 kg

Order number: 0 601 081 ...

Length: 200 mm

Width: 85 mm

Height: 32 mm

Detectable materials: **Ferrous metals, non-ferrous metals, wooden studs, live cables**

Max. detection depth: 120 mm

Detection depth, steel, max.: 120 mm

Detection depth, copper, max.: 80 mm

Power supply: 1 x 9 V 6LR61

Automatic deactivation facility, approx.: 5 minutes

Scope of supply

... 000

1 x 9 V 6LR61 (block) battery

✓

Hand strap

✓

Protective bag

✓

Wallscanner

D-tect 200 C Professional



Best performing wallscanner for safe and correct execution of the work

- 01 Bosch Radar Technology and groundbreaking operating system for precision, safety, and clear illustration of detected objects
- 02 Quick documentation guaranteed due to screenshot feature(download via USB/SD card slot)

Other feature

- The D-tect 200 C offers four views (Object View, Spot View, Signal View and Signal View 2D) and three different measuring modes (object detection, leakage detection and distance measurement)



Technical data

0.5 kg

Order number: 0 601 081 ...

Length: 240 mm

Width: 104 mm

Height: 51 mm

Detectable materials: **Plastic pipes, water-filled plastic pipes, magnetic metals, non-magnetic metals, wooden substructures, live cables, non-live cables, low-voltage & data cables**

Max. detection depth: 200 mm

Views: **Object view, signal view, signal view 2D, spot view**

Battery pack: 12 V 2.0 Ah Li-Ion, 4 x (AA) alkaline batteries

Battery life: 2 h (4xAA) to 5 h (12 V, 2.0 Ah)

Scope of supply

... 600

4 x (AA) alkaline batteries

✓

Hand strap

✓

Protective bag

✓

Cordless Inspection Camera

GIC 120 C

Professional




Efficient inspection and documentation of hard-to-reach areas

- 01 For optimum spacial orientation, the 'Up is Up'™ function rotates and simultaneously aligns the image on a large screen
- 02 Directly transfers images and videos via USB cable for quickly storing high-quality documentation of critical areas
- 03 Dual Power Source technology allows for use with a 12 V Li-ion battery or standard alkaline batteries

Other features

- ▶ Digital zoom for better recognition of details
- ▶ 120 cm long camera cable for better reaching of problem areas
- ▶ Bright LED for illuminating dark areas



Technical data 0.64kg

Order number: 0 601 241 ...

Display size: 3.5"

Display resolution: 320 x 240 px

Length of camera cable: 120 cm

Diameter of camera head: 8.5 mm

Battery voltage: 12 V

Scope of supply ... 200

- 4 x 1.5 V LR6 (AA) ✓
- GIC camera cable, 8.5 mm diameter, 120 cm long ✓
- Hook, magnet, mirror ✓

Thermo Camera

GTC 400 C

Professional



Immediate visualisation of temperature differences with smart documentation

- 01 Fast exchange of data and easy documentation of thermal images
- 02 Picture-in-picture technology overlays thermal and real images for easy-to-see localisation of the measurement
- 03 Flexible battery system can be powered by a 12 V LI-ION battery or with standard alkaline batteries



Technical data 0.5 kg

Order number: 0 601 083 ...

Measurement range: -10 °C to +400 °C

Measuring accuracy of IR: ±3.0 °C

Size of display: 3.5"

Size of IR sensor: 160x120 px

Field of view (FOV): 53x43 °

Scope of supply ...171


- 1 x battery GBA 12V 2.0Ah (1 600 Z00 0) ✓
- L-BOXX (136 1 600 A00 1RR) ✓
- Quick charger GAL 12V-40 Professional (1 600 A01 9R4) ✓
- Hand strap


Accessories specifications **at a glance**


Laser receivers		Laser receiver	Measuring accuracy (fine / rough)	Power supply	Dust and splash protection	Weight, approx.	Suitable for	Part number
	LR 1 Professional laser receiver	0 - 200 m	±1 mm ±3 mm	1x9 V 6LR61	IP65	0.36 kg	GRL 400 H, GRL 300 HV Professional	0 601 015 400
	LR 2 Professional laser receiver	5 - 50 m	±1 mm ±3 mm	1x9 V 6LR61	IP54	0.2 kg	GLL 3-50, GLL 3-80P, GLL 2-80, GLL 2-50 Professional	0 601 069 100
	LR 6 Professional laser receiver	5 - 50 m	±1 mm ±3 mm	2x1.5 VR03	IP54	0.12 kg	GLL 5-50, GLL 3-80 GCL 2-50 C Professional	0 601 069 H00
	LR 7 Professional laser receiver	5 - 50 m	±1 mm ±3 mm	2x1.5 VR03	IP54	150 kg	GCL 2-50 C, GCL 2-50 CG GLL 3-80, GLL 3-80 G, GLL 3-80 CG Professional	0 601 069 J00


Tripods		Max. work height	Tripod connection	Weight, approx.	Suitable for	Part number
	BT 150 Professional building tripod	55 -157 cm	1/4"	1.3 kg	GCL 25, GPL 5, GPL 3, GLL 2-15, GLL 3-50, GLL 3-80 P, GLL 2-80 P, GLL 2-50, GLM 50, GLM 50 C, GLM 80, GLM 100 C, GLM 120 C, GLM 150, GLM 250 VF Professional	0 601 096 B00
	BT 160 Professional building tripod	97 -160 cm	5/8"	4.1 kg	GPL 5, GPL 3, GLL 2-15, GLL 3-80 P, GLL 2-80 P, GLL 3-50, GCL 25, GRL 400H, GRL300 HGV, GRL HV, GRL 500 H/V, GOL 20 G/D, GOL 26 G/D GOL 32 G/ D Professional	0 601 091 200
	New! BT 300 HD Professional building tripod	122 -295 cm	5/8"	7.2 kg	GPL 5, GPL 3, GLL 2-15, GLL 3-80 P, GLL 2-80 P, GLL 3-50, GCL 25, GRL 400 H, GRL 300 HVG, GRL 300 HV, GRL 500 H/HV, GOL 20 G/D, GOL 26 G/D, GOL 32 G/D Professional	0 601 091 400

Accessories specifications **at a glance**

Mounts				Weight, approx.	Suitable for	Part number
	BM 1 Professional universal mount	<ul style="list-style-type: none"> ► Flexible fitting of the mount, for example with screws, magnets or on a tripod ► The clamp makes the BM1 ideal for ceiling applications 		0.5 kg	GLL 3-80 P, GLL 3-80, GLL 3-80 G, GLL 2-80 P, GLL 3-50, GLL 2-50, GCL 25, GPL5, GPL 3 Professional	0 601 015 A01

Levelling Staff		Length	Sections	Weight, approx.	Suitable for	Part number
	GR 500 Professional levelling staff	5 m	5	1.98 kg	GRL 400 H, GRL 300 HV, GRL 300 HVG, GRL 500 H/HV, GOL 20 G/D, GOL 26 G/D, GOL 32G/D Professional	0 601 094 300

Laser viewing glasses (green)			Sections	Weight, approx.	Suitable for	Part number
	Laser viewing glasses (green) Professional	Improves the visibility of the green laser beam and make it easier to work in adverse lighting conditions	-	-	GRL 300 HVG Professional	0 608 M00 05J

Laser viewing glasses (red)			Sections	Weight, approx.	Suitable for	Part number
	Laser viewing glasses (red) Professional	Improves the visibility of the red laser beam and make it easier to work in adverse lighting conditions	-	-	GRL 400 H, GRL 300 HV, GRL 500 H/V, GRL 600 H/V Professional	1 608 M00 05B

ALL INFORMATION IN ONE HAND.

MeasureOn. Upgrade your efficiency.

With one app plus laser range finder, you have every project in your hand and under control. Sketch floor plans with your finger, add photos and notes, insert measurements and benefit from many more features – all in one app. And thanks to cloud-based project access, anywhere on all devices!



MeasureOn



TM of Google LLC



TM of Apple Inc.

Bosch Professional Measuring Tools.



MeasureOn:
Download now
for free.



BOSCH



GLM 50-27 CG
Professional



GLM 50-27 C
Professional



GLM 100-25 C
Professional



GLM 120 C
Professional



GLM 50 C
Professional

GREEN BEAM FOR MAXIMUM LINE VISIBILITY.

Bosch Levelling tools with green beam technology – for better visibility, excellent line clarity and high accuracy. Upgrade your efficiency with easy, intuitive handling for effortless precision in a wide range of alignment jobs.

Bosch Professional Measuring Tools.



BOSCH



BOSCH



ROBUST AND RELIABLE.

Ideal for outdoor use.

GOL 32 D Professional Optical level.



Calibration services available. CALL US NOW!

Robert Bosch East Africa Ltd.
Power Tools Division
Delta Chambers, 7th Floor
Waiyaki Way - Westlands, Nairobi
Sales: 0790 205 211 / 0799 447 117

Dealer Stamp

